



**MOORING**

# ENGLISH BRAIDS



**3 STRAND  
POLYESTER**

ENGLISH BRAIDS LTD.,  
SPRING LANE, MALVERN,  
WORCESTERSHIRE.  
WR14 1AL

Tel: +44 (0) 1684 892222

Fax: +44 (0) 1684 892111

Email: [Info@englishbraids.com](mailto:Info@englishbraids.com)

[www.englishbraids.com](http://www.englishbraids.com)



INVESTOR IN PEOPLE



# 3 STRAND POLYESTER


## Recommended uses

Mooring Warps  
Anchor warps  
Lanyards

**3 STRAND POLYESTER** Is the preferred mooring rope. Where Nylon absorbs water and goes yellow and stiff with age, Polyester remains soft and white.



This means that it retains more of its strength and integrity and is recommended as the preferred alternative to three strand Nylon for mooring warps although it has less stretch than Nylon.

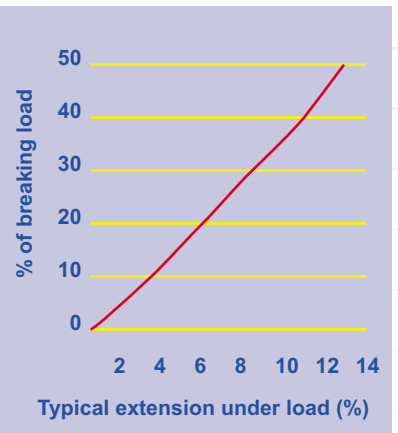

Diameter mm	Breaking Load Kg
6	830
8	1700
10	2340
12	3310
14	4180
16	5635
18	6950
20	7500
24	11000


### TECHNICAL FEATURES

- Retains strength and flexibility
- Good abrasion resistance
- Easily spliceable
- Good sheave action

### OPTIMISING SERVICE LIFE

- Avoid contamination with alkalis
- Wash in fresh water before storing
- Avoid crushing the rope or snagging threads

0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m 11m 12m 13m 14m 15m 16m

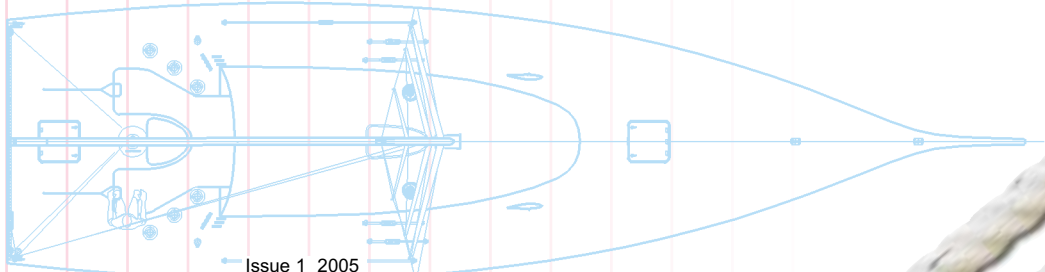

Issue 1 2005

TECHNICAL REVIEW

